

MOLLA DI REGOLAZIONE DOPPIA SOFT

PER PENDINO Ø 4 mm


Per pendino Ø 4 mm.

MATERIALI

Molla in Deltatone.

AVVERTENZE

- L'utilizzo e il montaggio del prodotto è esclusivamente riservato al personale esperto
- Il prodotto è monouso nel senso che le caratteristiche di durata stabilità e tenuta sono garantite per una singola applicazione e in nessun caso può essere riutilizzato in altre applicazioni

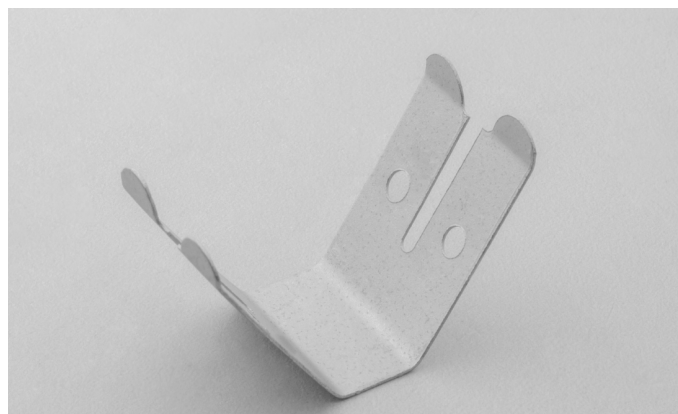

TIPOLOGIA D'USO

Per la sospensione di profili da soffitto per la realizzazione di controsoffitti.



INFORMAZIONI PRODOTTO

CODICE	SPESSORE [mm]	CONFEZIONE / IMBALLO - PZ.
NAMCSU21003	0,6	100/2.400

DATI TECNICI


CODICE	CARICO MAX. CONSENTITO IN POSIZIONE VERTICALE		CARICO MAX. GARANTITO IN POSIZIONE VERTICALE	
	[kgf]	[kN]	[kgf]	[kN]
NAMCSU21003	120	1,20	40	0,40

**SOFT PLATED DOUBLE SPRING FOR $\varnothing$ 4
mm HANGER WIRE**

For $\varnothing$ 4 mm hanger wire.

MATERIALS

Galvanized spring.

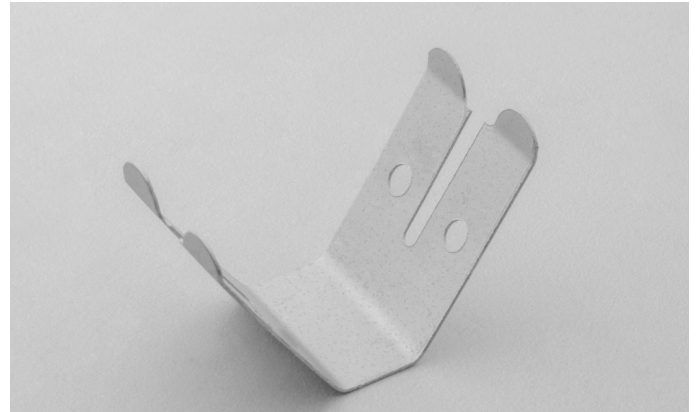

WARNINGS

- The use and assembly of the product is exclusively reserved for expert staff
- The product is single-use. That means its characteristics of durability, stability and tightness are guaranteed for a single application and in no case may it be reused in other applications

APPLICATION

For the suspension of ceiling profiles for the construction of false ceilings.



all solutions in one partner®

DATA SHEET - CODE NAMCSU21003



PRODUCT INFORMATION

CODE	THICKNESS [mm]	BOX / PACKAGING - PCS
NAMCSU21003	0,6	100/2.400

TECHNICAL DATA

CODE	MAX. PERMISSIBLE LOAD IN VERTICAL POSITION		MAX. LOAD GUARANTEED IN VERTICAL POSITION	
	[kgf]	[kN]	[kgf]	[kN]
NAMCSU21003	120	1,20	40	0,40